



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM160900632001
Page: 1 of 30

TEST REPORT

The following sample(s) was/were submitted and identified on behalf of the client as:

Application No.:	GZEM1609006320HS
Applicant:	Jiaye Industrial Ltd.
Manufacturer:	The same as applicant
Factory:	The same as applicant
Product Description:	Built in gas hob/gas hob
Model No.:	Please refer to next page for further details.
Trade Mark:	Jiaye
Standards:	EN 55014-1:2006+A1:2009+A2:2011, EN 55014-2:2015, EN 61000-3-2:2014, EN 61000-3-3:2013.
Date of Receipt:	2016-10-09
Date of Test:	2016-10-11 to 2016-10-12
Date of Issue:	2016-11-10
Test Result:	Pass*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EU Declaration of Conformity and compliance with all relevant EU Directives.



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM160900632001

Page: 2 of 30

Model No.:	JY-S5001, JY-S5002, JY-S5003, JY-S5004, JY-S5006, JY-S5007, JY-S5008, JY-S5014, JY-S5015, JY-S5026, JY-S5027, JY-S5028, JY-S5071, JY-S5072, JY-S5075, JY-S5083, JY-S5084, JY-S5088, JY-S5089, JY-S5093, JY-S5094, JY-S5095, JY-S5096, JY-S5097, JY-S5098, JY-S5099, JY-S5101, JY-S5103, JY-S5105, JY-S5106, JY-SG5035, JY-S4001, JY-S4002, JY-S4005, JY-S4006, JY-S4012, JY-S4015, JY-S4017, JY-S4030, JY-S4031A, JY-S4033, JY-S4037B, JY-S4038, JY-S4039, JY-S4040, JY-S4041, JY-S4043, JY-G5001, JY-G5047, JY-G5006, JY-G5012, JY-G5018, JY-G5017, JY-G5026, JY-G5027, JY-G5045, JY-G5046, JY-G5060, JY-G5061, JY-G5062, JY-G5063, JY-G5064W, JY-G5065, JY-G5030, JY-G5066, JY-G5067, JY-G5068, JY-G5069, JY-G5070, JY-G5071, JY-G4002, JY-G4003, JY-G4004, JY-G4005, JY-G4006, JY-G4007, JY-G4012, JY-G4022, JY-G4023, JY-G4024. ♣
♣	Please refer to section 3 of this report for further details.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-11-10		Original

Authorized for issue by:				
Tested By		 (Owen Huang) / Project Engineer		2016-10-11 to 2016-10-12 Date
Prepared By		 (Jenny Chen) / Clerk		2016-10-19 Date
Checked By		 (Cherie Luo) / Reviewer		2016-10-20 Date



3 Test Summary

Electromagnetic Interference (EMI)				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emission on AC (150k to 30MHz)	EN 55014-1:2006 +A1:2009+A2:2011	EN 55014-1:2006 +A1:2009+A2:2011	Table 1 Columns 2&3	PASS
Disturbance Power (30MHz to 300MHz)	EN 55014-1:2006 +A1:2009+A2:2011	EN 55014-1:2006 +A1:2009+A2:2011	Table 2a, Table 2b Columns 2&3 ♀	PASS
Discontinuous Interference on AC (150kHz to 30MHz)	EN 55014-1:2006 +A1:2009+A2:2011	EN 55014-1:2006 +A1:2009+A2:2011	Clause 4.2 of EN 55014-1	PASS
Harmonic Emission on AC	EN 61000-3-2:2014	EN 61000-3-2:2014	Class A	PASS**
Flicker Emission on AC	EN 61000-3-3:2013	EN 61000-3-3:2013	Clause 5 of EN 61000-3-3	PASS
Electromagnetic Susceptibility(EMS) ¹⁾				
Test	Test Requirement	Test Method	Class / Severity	Result
Immunity	EN 55014-2:2015	EN 55014-2:2015	Clause 4.1 of EN 55014-2	PASS**
Remark				
EUT: In this whole report EUT means Equipment Under Test.				
¹⁾ : The EUT belongs to Category I apparatus of EN 55014-2:2015 .				
♀ Disturbance Power test is applied to the EUT since: 1) All the measurement result are lower than the applicable limits (Table 2a) minus the corresponding margin (Table 2b); or the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector. 2) No clock frequency or oscillator frequency of the EUT is more than or equal to 30 MHz. Please refer to section 7.2 of this test report for more details.				
**Please refer to Section 7.4 & 8 of this report for details.				



♣ Model No.: JY-S5001, JY-S5002, JY-S5003, JY-S5004, JY-S5006, JY-S5007, JY-S5008, JY-S5014, JY-S5015, JY-S5026, JY-S5027, JY-S5028, JY-S5071, JY-S5072, JY-S5075, JY-S5083, JY-S5084, JY-S5088, JY-S5089, JY-S5093, JY-S5094, JY-S5095, JY-S5096, JY-S5097, JY-S5098, JY-S5099, JY-S5101, JY-S5103, JY-S5105, JY-S5106, JY-SG5035, JY-S4001, JY-S4002, JY-S4005, JY-S4006, JY-S4012, JY-S4015, JY-S4017, JY-S4030, JY-S4031A, JY-S4033, JY-S4037B, JY-S4038, JY-S4039, JY-S4040, JY-S4041, JY-S4043, JY-G5001, JY-G5047, JY-G5006, JY-G5012, JY-G5018, JY-G5017, JY-G5026, JY-G5027, JY-G5045, JY-G5046, JY-G5060, JY-G5061, JY-G5062, JY-G5063, JY-G5064W, JY-G5065, JY-G5030, JY-G5066, JY-G5067, JY-G5068, JY-G5069, JY-G5070, JY-G5071, JY-G4002, JY-G4003, JY-G4004, JY-G4005, JY-G4006, JY-G4007, JY-G4012, JY-G4022, JY-G4023, JY-G4024.

According to the declaration of the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the outer decoration and burner.

Therefore only one model **JY-S4002** was tested in this report.



4 Contents

1	Cover Page	1
2	Version	3
3	Test Summary	4
4	Contents	6
5	General Information.....	7
5.1	Client Information.....	7
5.2	General Description of E.U.T.....	7
5.3	Details of E.U.T.....	7
5.4	Description of Support Units.....	7
5.5	Deviation from Standards	7
5.6	General Test Climate During Testing	7
5.7	Abnormalities from Standard Conditions	7
5.8	Monitoring of EUT for All Immunity Test	7
5.9	Test Location.....	7
5.10	Test Facility	8
6	Equipment List.....	9
7	Electromagnetic Interference Test Results.....	11
7.1	Conducted Emissions on Mains Terminals, 150 kHz to 30 MHz	11
7.2	Disturbance Power Test, 30 MHz to 300 MHz.....	15
7.3	Discontinuous Interference, 150 kHz to 30 MHz	18
7.4	Harmonics Test Result.....	21
7.5	Flicker Test Result	22
8	Electromagnetic Susceptibility Test Results.....	25
9	Photographs.....	26
9.1	EUT Constructional Details.....	26



5 General Information

5.1 Client Information

Applicant: Jiaye Industrial Ltd.
Address of Applicant: No. 38 Donghai West Road, Dongfeng Town, Zhongshan city, Guangdong, China
Manufacturer: The same as applicant
Address of Manufacturer: The same as address of applicant
Factory: The same as applicant
Address of Factory: The same as address of applicant

5.2 General Description of E.U.T.

Product Description: Built in gas hob/gas hob
Model No.: JY-S4002

5.3 Details of E.U.T.

Rated Supply: AC 220-240V 50/60Hz
Power Cable: 1.2m x 3 wires unscreened AC mains cable.

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Deviation from Standards

None.

5.6 General Test Climate During Testing

Temperature: 15-30 °C Humidity: 30-70 %RH Atmospheric Pressure: 860-1060 mbar

5.7 Abnormalities from Standard Conditions

None

5.8 Monitoring of EUT for All Immunity Test

Audio: N/A
Visual: N/A

5.9 Test Location

All tests were performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663
Tel: +86 20 82155555 Fax: +86 20 82075059
No tests were sub-contracted.



5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC 61010-1:2006-10 and Rules of procedure IEC 61010-2:2006-10, and the relevant IEC CB-Scheme Operational documents.



6 Equipment List

Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2016-01-25	2017-01-24
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2016-09-20	2017-09-19
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2015-12-19	2016-12-18
EMC0107	Coaxial Cable	SGS	2m	N/A	2016-07-24	2018-07-23
EMC0106	Voltage Probe	SGS	N/A	N/A	2016-04-05	2018-04-04
EMC0120	8 Line ISN	Fischer Custom Communications	FCC-TLISN-T8- 02	20550	2016-09-20	2017-09-19
EMC0121	4 Line ISN	Fischer Custom Communications	FCC-TLISN-T4- 02	20549	2016-09-20	2017-09-19
EMC0122	2 Line ISN	Fischer Custom Communications	FCC-TLISN-T2- 02	20548	2016-09-20	2017-09-19
EMC2047	CDN	Elektronik- Feinmechanik	L-801:AF2	2793	2015-09-19	2018-09-18
EMC2048	CDN	Elektronik- Feinmechanik	L-801:M2/M3	2738	2015-09-25	2018-09-24
EMC2062	6dB Attenuator	HP	8491A	24487	2016-04-05	2018-04-04
EMC0167	Conical metal housing	SGS-EMC	N/A	N/A	2016-04-19	2018-04-18

Disturbance Power						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m ³	N/A	N/A	N/A
EMC2040	Absorbing Clamp	Beijing Dazhe Co. Ltd.	ZN23201	N/A	2016-01-28	2017-01-27
EMC0303	7m Coaxial Cable	SGS	7m	N/A	2015-06-30	2017-06-29
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2015-12-19	2016-12-18
EMC2062	6dB Attenuator	HP	8491A	24487	2016-04-05	2018-04-04
EMC0305	Slide Bar Controller	HD-GmbH	HD50	050/490	N/A	N/A
EMC0103	Slide Bar RP	HD-GmbH	KMS560	560/392	N/A	N/A

Click						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC2049	Click Meter	AFJ	CL55C	55049840042	2016-07-04	2017-07-03
EMC0206	Coaxial Cable	N/A	1.5m	N/A	2016-09-20	2018-09-19
EMC0203	LISN	AFJ	LS16-OPT001	16019831056	2016-01-25	2017-01-24



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM160900632001

Page: 10 of 30

Harmonics / Flicker test						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0608	AC Power Source	California	50001iX	56627	2016-04-05	2017-04-04
EMC0607	Power Analyzer	California	PACS	72400	2016-04-05	2017-04-04

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2016-09-01	2017-08-31
EMC0007	DMM	Fluke	73	70671122	2016-08-22	2017-08-21



7 Electromagnetic Interference Test Results

7.1 Conducted Emissions on Mains Terminals, 150 kHz to 30 MHz

Test Requirement: EN 55014-1
Test Method: EN 55014-1
Test Date: 2016-10-11
Test voltage: AC 230V 50Hz
Frequency Range: 150KHz to 30MHz
Detector: Peak for pre-scan
Quasi-Peak and Average for final measurement
(9 kHz resolution bandwidth)

Limit:


Frequency range MHz	At mains terminals dB (μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	59 to 46
0.50 to 5	56	46
5 to 30	60	50
Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		
Note2: The lower limit is applicable at the transition frequency.		

7.1.1 E.U.T. Operation

Test the EUT in idle mode.

A pre-test at 160KHz shall be made over a range of 0.9 to 1.1 times the rated voltage in order to check the level of disturbance varies considerably with the supply voltage, compliance test at AC 230V as no worse case was found.

7.1.2 Test Setup and Procedure

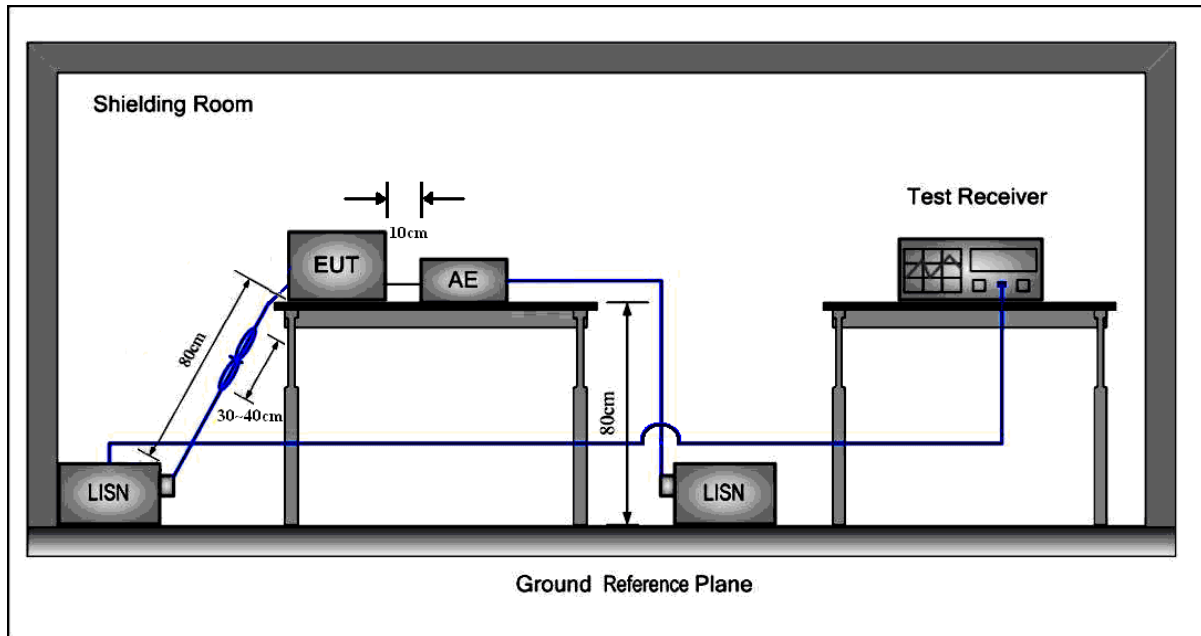

1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment were at least 0.8m from the LISN.




7.1.3 Measurement Data

Live Line:

Peak Scan:

Level (dBμV)

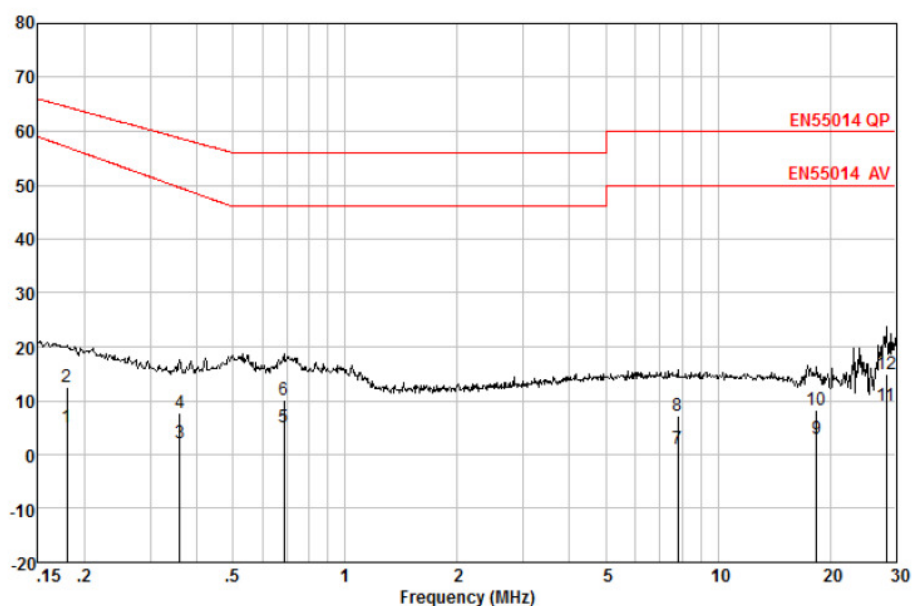


Quasi-peak and Average measurement:

Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.180	4.29	0.80	0.00	5.09	57.05	-51.96	Average
0.180	11.78	0.80	0.00	12.58	64.50	-51.92	QP
0.360	1.61	0.55	0.00	2.16	49.56	-47.40	Average
0.360	7.07	0.55	0.00	7.62	58.74	-51.12	QP
0.686	4.59	0.45	0.01	5.05	46.00	-40.95	Average
0.686	9.75	0.45	0.01	10.21	56.00	-45.79	QP
7.810	0.68	0.30	0.20	1.18	50.00	-48.82	Average
7.810	6.64	0.30	0.20	7.14	60.00	-52.86	QP
18.426	2.48	0.07	0.30	2.85	50.00	-47.15	Average
18.426	8.03	0.07	0.30	8.40	60.00	-51.60	QP
28.302	8.49	0.04	0.40	8.93	50.00	-41.07	Average
28.302	14.40	0.04	0.40	14.84	60.00	-45.16	QP

Level = Read Level + LISN Factor + Cable Loss.



Neutral Line
Peak Scan:
Level (dBμV)

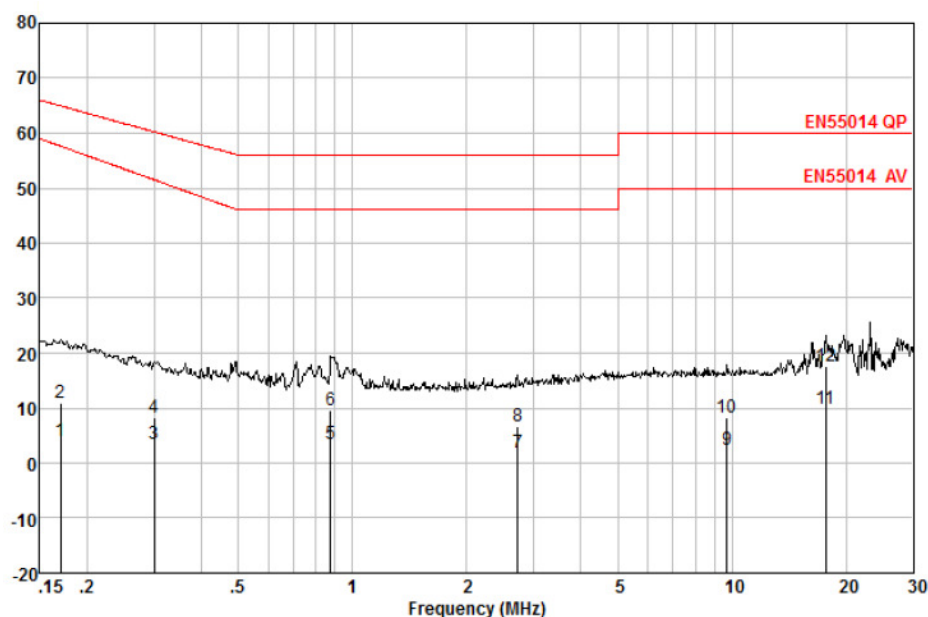

Quasi-peak and Average measurement:

Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.170	3.29	0.79	0.00	4.08	57.63	-53.55	Average
0.170	10.10	0.79	0.00	10.89	64.94	-54.05	QP
0.300	2.74	0.62	0.00	3.36	51.51	-48.15	Average
0.300	7.68	0.62	0.00	8.30	60.24	-51.94	QP
0.876	2.90	0.54	0.01	3.45	46.00	-42.55	Average
0.876	9.03	0.54	0.01	9.58	56.00	-46.42	QP
2.721	1.41	0.44	0.07	1.92	46.00	-44.08	Average
2.721	6.21	0.44	0.07	6.72	56.00	-49.28	QP
9.705	1.84	0.41	0.20	2.45	50.00	-47.55	Average
9.705	7.77	0.41	0.20	8.38	60.00	-51.62	QP
17.661	9.50	0.16	0.30	9.96	50.00	-40.04	Average
17.661	17.06	0.16	0.30	17.52	60.00	-42.48	QP

Level = Read Level + LISN Factor + Cable Loss.



7.2 Disturbance Power Test, 30 MHz to 300 MHz

Test Requirement: EN 55014-1
Test Method: EN 55014-1
Test Date: 2016-10-11
Test voltage: AC 230V 50Hz
Frequency Range: 30MHz to 300MHz
Detector: Peak for pre-scan
Quasi-Peak and Average at frequency with maximum peak
(120kHz resolution bandwidth)

Limit:

Table 2a Columns 2&3

Frequency range MHz	At mains terminals (dB (pW))	
	Quasi-peak	Average
30 to 300	45 to 55	35 to 45
Note1: The limit increases linearly with the frequency in the range 30 MHz to 300 MHz.		

Table 2b Columns 2&3


Frequency range MHz	Margin (dB)	
	Quasi-peak	Average
200 to 300	0 to 10 dB	--
<p>NOTE 1: Appliances are deemed to comply in the frequency range from 300 MHz to 1 000 MHz if both of the following conditions (1) and 2)) are fulfilled:</p> <p>1) All the measurement result are lower than the applicable limits (Table 2a) minus the corresponding margin (Table 2b); or the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector.</p> <p>2) No clock frequency or oscillator frequency of the EUT is more than or equal to 30 MHz.</p> <p>NOTE 2: The measured result at a particular frequency shall be less than the relevant limit minus the corresponding margin (at that frequency).</p>		

7.2.1 E.U.T. Operation

Test the EUT in idle mode.

A pre-test at 50MHz shall be made over a range of 0.9 to 1.1 times the rated voltage in order to check the level of disturbance varies considerably with the supply voltage, compliance test at AC 230V as no worse case was found.

7.2.2 Test Setup

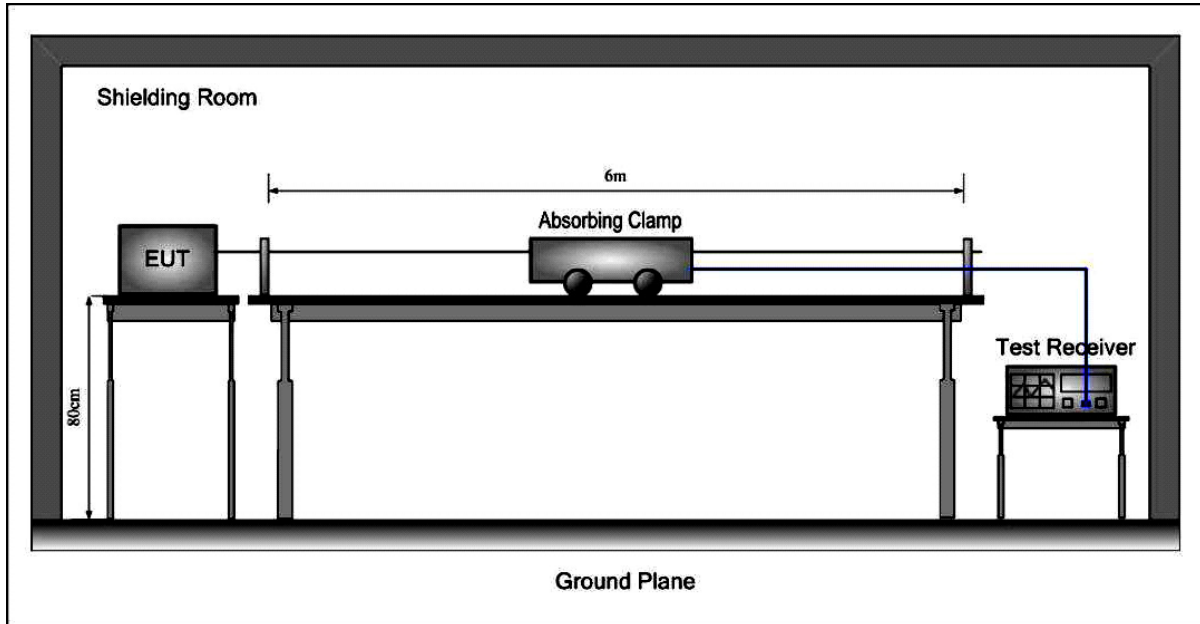

1. The disturbance power was measured with the EUT in a shielded room.
2. The distance between the clamp test set-up (the appliance, the lead to be measured and the absorbing clamp) and any other conductive objects (including persons, walls and ceiling, but excluding the floor) shall be at least 0.8m. The appliance to be tested shall be placed on a non-metallic support table parallel to the floor. The height of the table shall be $0.1\text{m} \pm 0.025\text{m}$ for appliances primarily intended to be positioned on the floor in normal use, and $0.8\text{m} \pm 0.05\text{m}$ for other appliances.
3. Auxiliary leads normally extendible by the user, for instance with a loose end or leads fitted with a (by the user) easily replaceable plug or socket on one or both ends, shall in accordance with 6.2.3 be extended to a length of about 6 m. Any plug or socket which will not pass through the absorbing clamp due to its size shall be removed (see 6.2.3).
4. If the auxiliary lead is permanently fixed to the appliance and to the auxiliary apparatus and:
 - is shorter than 0.25m, measurement are not to be made on these leads.
 - is longer than 0.25m but shorter than twice the length of the absorbing clamp, it shall be extended to twice the length of the absorbing clamp.
 - is longer than twice the length of the absorbing clamp, measurements shall be made using the original lead.
5. The absorbing clamp was moved along the lead to obtain maximum disturbance.




7.2.3 Measurement Data

AC Mains:

Peak Scan:

Level (dBpW)

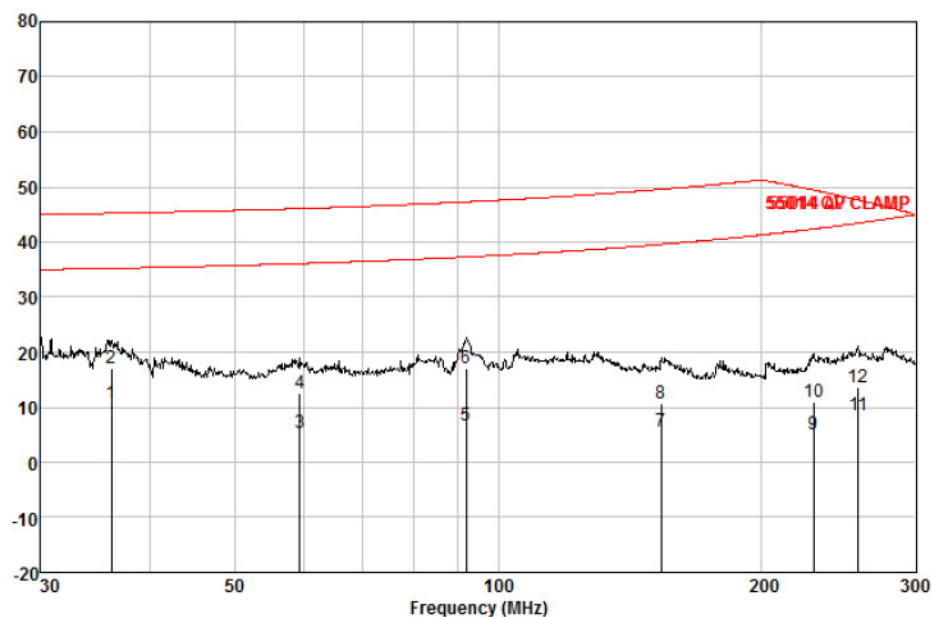

Quasi-peak and Average measurement:

Frequency MHz	Read Level dBuV	Cable Loss dB	Clamp Factor dBpW/dBuV	Measured Level dBpW	Limit Line dBpW	Over limit dB	Remark
36.151	5.93	1.29	3.47	10.69	35.23	-24.54	Average
36.151	12.36	1.29	3.47	17.12	45.23	-28.11	QP
59.309	3.44	1.74	0.16	5.34	36.09	-30.75	Average
59.309	10.71	1.74	0.16	12.61	46.09	-33.48	QP
91.859	4.91	2.24	-0.39	6.76	37.29	-30.53	Average
91.859	15.24	2.24	-0.39	17.09	47.29	-30.20	QP
153.505	4.38	3.03	-1.85	5.56	39.57	-34.01	Average
153.505	9.53	3.03	-1.85	10.71	49.58	-38.87	QP
229.151	4.09	3.78	-2.84	5.03	42.38	-37.35	Average
229.151	10.12	3.78	-2.84	11.06	49.46	-38.40	QP
257.704	5.49	4.08	-1.11	8.46	43.43	-34.97	Average
257.704	10.59	4.08	-1.11	13.56	47.66	-34.10	QP



7.3 Discontinuous Interference, 150 kHz to 30 MHz

Test Requirement: EN 55014-1
Test Method: EN 55014-1
Test Date: 2016-10-12
Test voltage: AC 230V 50Hz
Frequency range: 150kHz, 500kHz, 1.4MHz, 30MHz.
Class/Severity: Clause 4.2 of EN 55014-1

Limit


Provision	Limit		
	Click Rate (N)		
1	All clicks < 20 ms	90 % click < 10 ms	$N \leq 5$
2	$N \leq 0,2$	$L_q^b = L^a + 44$	Clicks ^c $\leq 25\%$ exceed L_q^b
3	$30 \geq N > 0,2$	$L_q^b = L^a + 20 \lg(30/N)$	Clicks ^c $\leq 25\%$ exceed L_q^b
<p>^a The limits L of Conducted Emissions apply also to discontinuous disturbances from all equipment which produce:</p> <p>1) disturbances other than clicks, or</p> <p>2) clicks with a click rate N equal to or greater than 30</p> <p>^b The relevant limit L_q for continuous disturbance, as given in 4.1.1 for the measurement with the quasi-peak detector, increased by a certain value determined from the click rate N (see also 4.2.2.2)</p> <p>The click limit applies to the disturbance assessed according to the upper quartile method</p> <p>^c a quarter of the number of the clicks registered during the observation time T is allowed to exceed the click limit L_q</p>			

7.3.1 E.U.T. Operation

Test the EUT in igniting mode.

A pre-test at 160KHz shall be made over a range of 0.9 to 1.1 times the rated voltage in order to check the level of disturbance varies considerably with the supply voltage, compliance test at AC 230V as no worse case was found.

7.3.2 Test Setup and Procedure

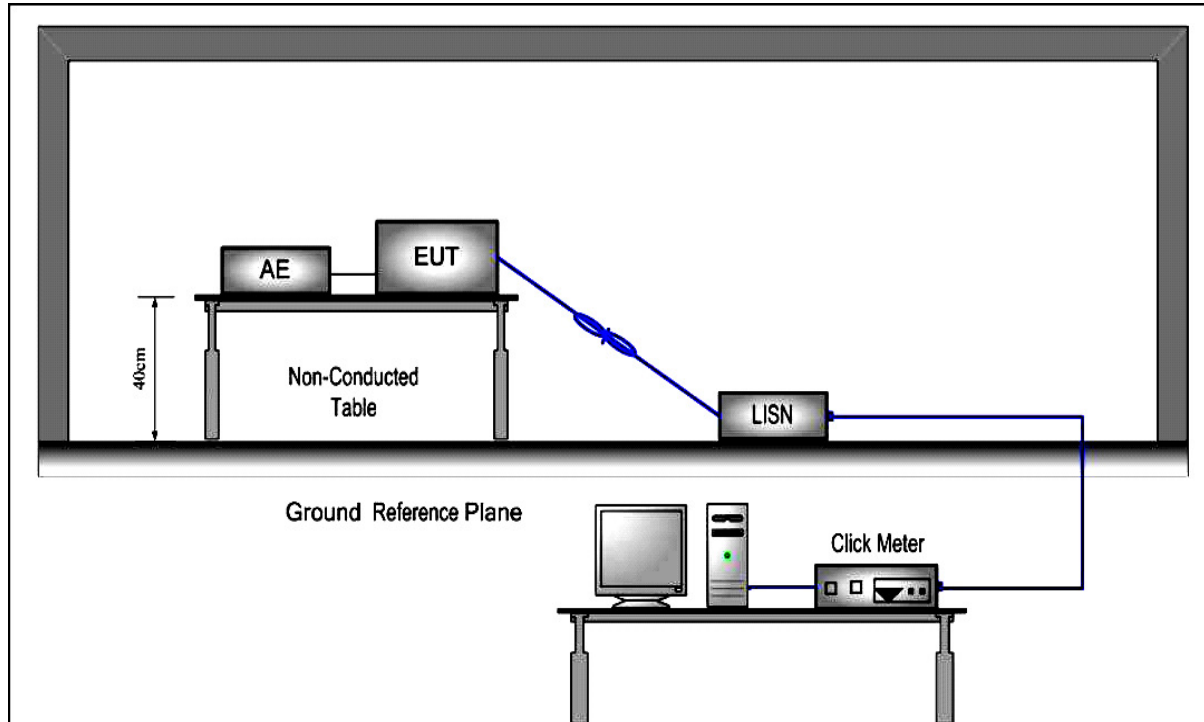

1. The EUT was placed on a 0.4m high non-metallic table in shielded room, the ground of shielded room used as Ground Reference Plane (GRP), and keeps a distance of at least 0.8m from any of the other metallic surface.
2. The EUT was connected to an artificial mains network and at a distance of 0.8m from it, the excess lead of EUT was bundled with a length of 0.3m to 0.4m parallel to the main lead.
3. The number of counted clicks above the permitted limit for continuous interference and their duration, spacing and rate were measured during the observation time. When relevant, a permitted(relaxed) limit for clicks were calculated and a second measurement was performed. Determination of compliance with the permitted limit according to the upper quartile method.

7.3.3 Measurement Data

File		First Pass			
Title	Test#	Rx1	Rx2	Rx3	Rx4
	1	150KHz	500KHz	1.4MHz	30MHz
Date	Time				
	10:00				
Required					
Executed by					
Description					
Model					
SN					
Type					
Report					
Work Dir					
Rx1 150KHz Pass Rx2 500KHz Pass Rx3 1.4MHz Pass Rx4 30MHz Pass		First Pass CISPR Short 0 0 0 0 Long 0 0 0 0 Fast Long 0 0 0 0 4.2.3.2 90 Total Clicks 0 0 0 0 Continuous Int. Events 0 0 0 0 Correction TIME (s) 0 0 0 0 Manual Switch Op 0 0 0 0 2 Click 0 0 0 0 Limit dBuV 90.0 80.0 80.0 84.0 7.4.2.2 N 0.00 0.00 0.00 0.00 Limit dBuV 50.0 50.0 50.0 50.0 Allowed Clicks 0 0 0 0			
Test Conditions Remote Input Attenuator External Attenuator NONE 20 dB 0 dB Off. Rx1 150KHz Off. Rx2 500KHz Off. Rx3 1.4MHz Off. Rx4 30MHz 0.0 0.0 0.0 0.0		Second Pass Short 0 0 0 0 Long 0 0 0 0 Total Clicks 0 0 0 0 Continuous Int. Events 0 0 0 0 TIME (s) 0.00 0.00 0.00 0.00 2 Click 0 0 0 0			
View Log		PASS PASS ☒ ☒ ☒ ☒			

Conclusion:

The product meets the requirements of **Provision 1**.



7.4 Harmonics Test Result

Test Requirement: EN 61000-3-2
Test Method: N/A: See Remark Below
Frequency Range: 100 Hz to 2 kHz

Remark:

Since the EUT was belong to exception of clause 7 and Annex C, according to EN 61000-3-2 figure 1, it was deemed to conform to the requirements of this standard without further testing.

“7 Harmonic current limits

The procedure for applying the limits and assessing the results is shown in Figure 1.

For the following categories of equipment, limits are not specified in this standard:

NOTE 1 Limits may be defined in a future amendment or revision of the standard.

– equipment with a rated power of 75 W or less, other than lighting equipment.

NOTE 2 This value may be reduced from 75 W to 50 W in the future, subject to approval by National Committees at that time.

– professional equipment with a total rated power greater than 1 kW.

– symmetrically controlled heating elements with a rated power less than or equal to 200 W.

– independent dimmers for incandescent lamps with a rated power less than or equal to 1 kW.

NOTE 3 See also C.5.3.”

and

No limit applies for all LED lighting equipments with active input power ≤ 25 W except Discharge lighting equipment (refer to 7.3 b))

Kitchen machines as listed in the scope of IEC 60335-2-14 are deemed to conform to the harmonic current limits of this standard without further testing.

Please read clause 7 & Annex C of this standard for reference.



7.5 Flicker Test Result

Test Requirement:	EN 61000-3-3
Test Method:	EN 61000-3-3
Test Date:	2016-10-12
Test voltage:	AC 230V 50Hz
Measurement Time:	10 mins
Class / Severity:	Clause 5 of EN 61000-3-3

7.5.1 E.U.T. Operation

Test the EUT in igniting mode.

Note: "Pst and Plt requirements shall not be applied to voltage changes caused by manual switching.

The limits shall not be applied to voltage changes associated with emergency switching or emergency interruptions."


Please also refer to Annex A (Application of limits and type test conditions) for details in EN 61000-3-3.

--No limits shall apply to lamps.

--Incandescent lamp luminaires with ratings less than or equal to 1 000 W and discharge lamp luminaires with ratings less than or equal to 600 W, are deemed to comply with the dmax limits in this standard and are not required to be tested.

--Ballasts are deemed to be part of luminaires and are not required to be tested.

7.5.2 Test Setup and Procedure

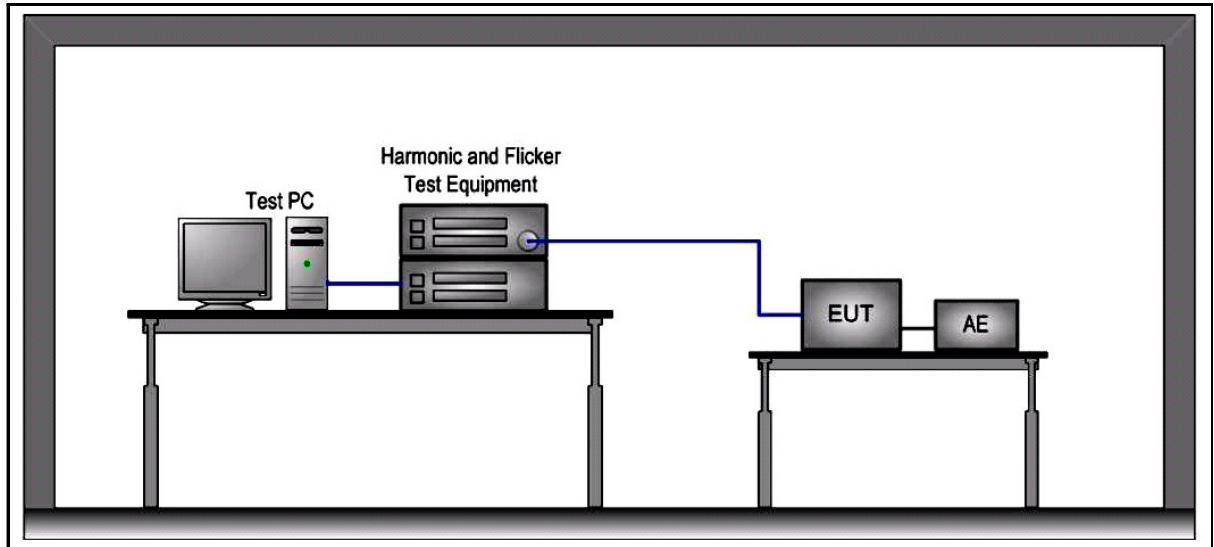

1. The test supply voltage (open-circuit voltage) was the rated voltage of the EUT. The test voltage was maintained within $\pm 2\%$ of the nominal value. The frequency was $50\text{ Hz} \pm 0.5\%$.
2. The voltage fluctuations and flicker were measured at the supply terminals of the EUT.
3. The observation period, T_p , for the assessment of flicker values by flicker measurement, flicker simulation, or analytical method was:
 - for P_{st} , $T_p = 10\text{ min}$.
 - for P_{lt} , $T_p = 2\text{ h}$.

The observation period included that part of the whole operation cycle in which the EUT produces the most unfavorable sequence of voltage changes.



7.5.3 Measurement Data


Flicker Test Summary per EN 61000-3-3 (Run time)

Test Result: Pass

Status: Test Completed

Pst and limit line

European Limits

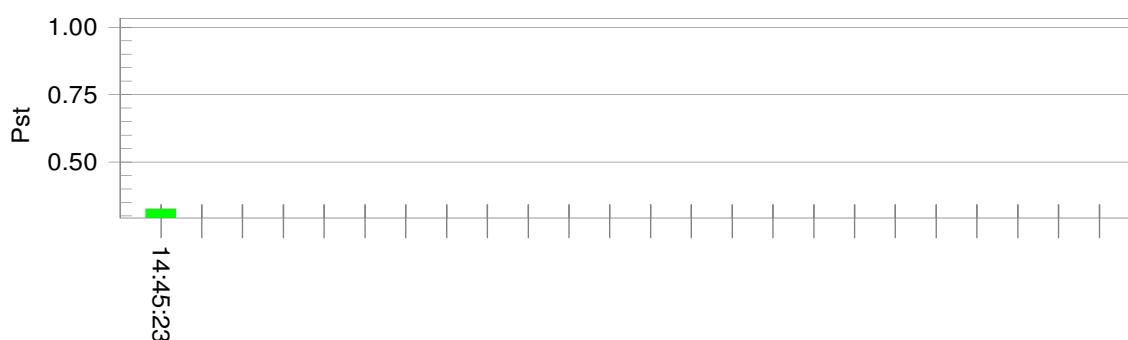

Parameter values recorded during the test:

Vrms at the end of test (Volt): 229.98

Highest dt (%)	0.00	Test limit (%)	N/A	N/A
T-max (mS)	0	Test limit (mS)	500.0	Pass
Highest dc (%)	0.00	Test limit (%)	3.30	Pass
Highest dmax (%)	0.00	Test limit (%)	4.00	Pass
Highest Pst (10 min. period)	0.064	Test limit:	1.000	Pass



8 Electromagnetic Susceptibility Test Results

Test Requirement: EN 55014-2
Test Method: N/A: See Remark Below

There is no need for immunity tests to be performed on this product in accordance with clause 7.2.1 of EN 55014-2 which states:

“Category I apparatus is deemed to fulfil the relevant immunity requirement without testing.”

For further details, please refer to clause 4.1 of EN 55014-2 which states:

“Category I: apparatus containing no electronic control circuitry.

Example: motor operated appliances, lighting toys, track sets without electronic control units, tools, heating appliances UV and IR radiators and apparatus containing components such as electromechanical switches and thermostats.


Electric circuits consisting of passive components (such as radio interference suppression capacitors or inductors, mains transformers and mains frequency rectifiers) are not considered to be electronic control circuitry.”



9 Photographs


9.1 EUT Constructional Details





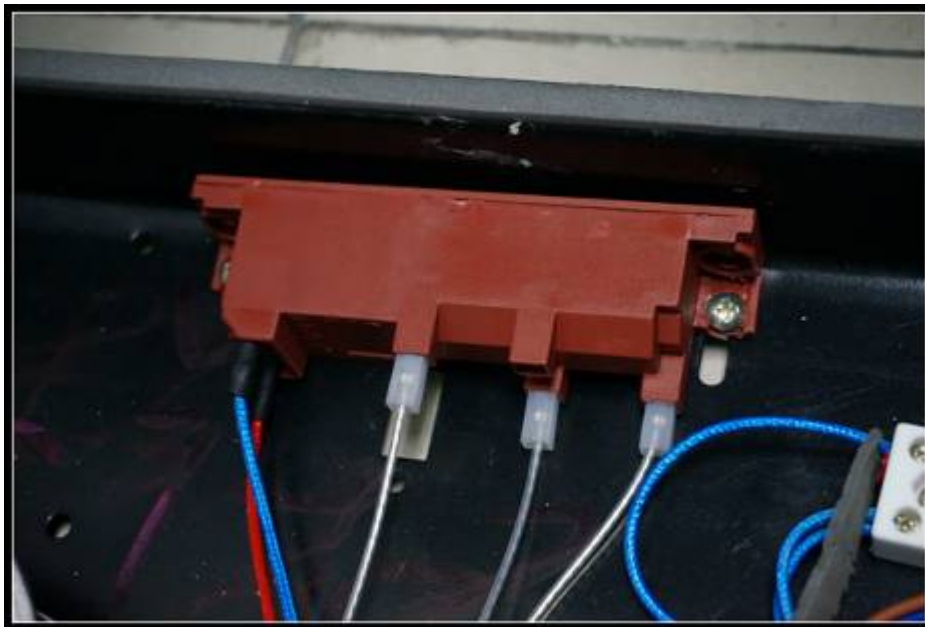

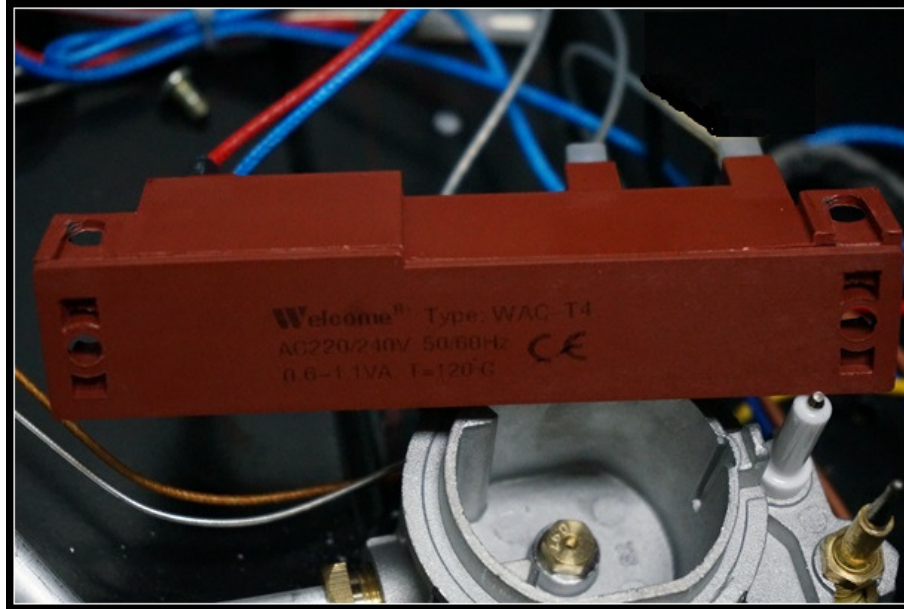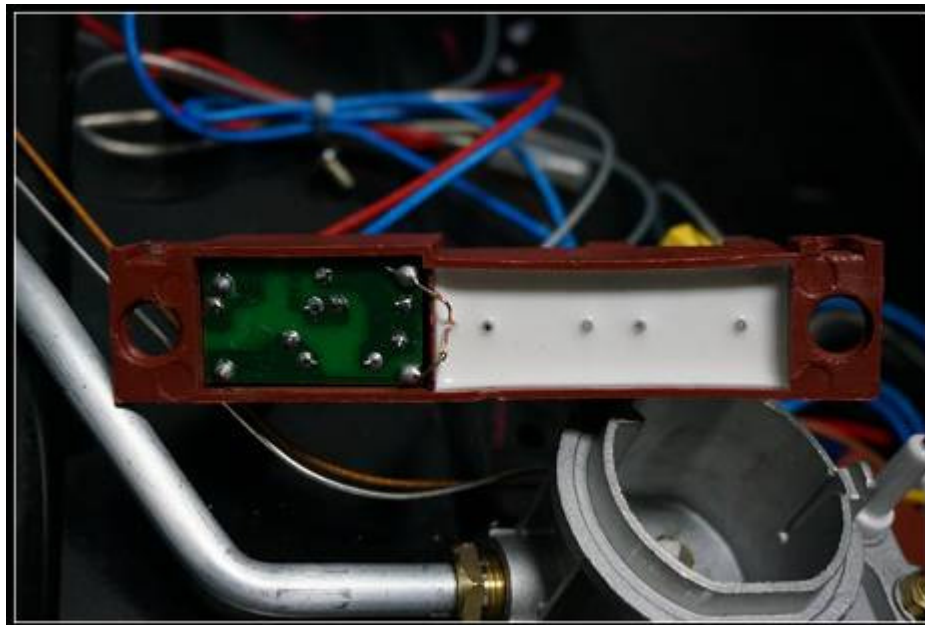

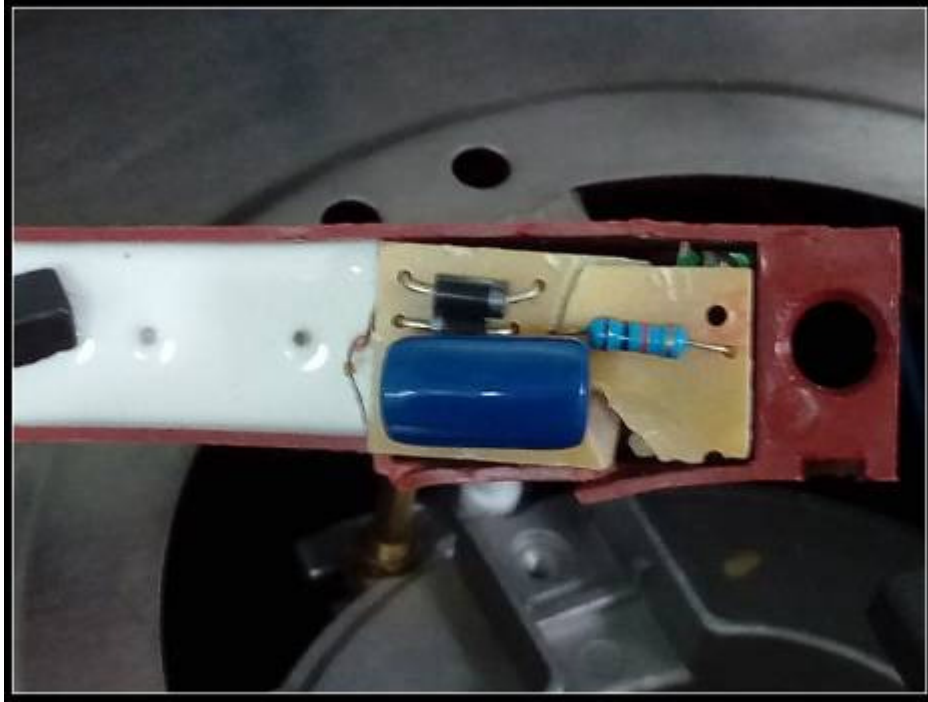

--End of Report--